



## Compliance Engineering Ireland Ltd

CLONROSS, DUNSHAUGHLIN, CO. MEATH, IRELAND

Tel: +353 1 8017000 Fax: +353 1 8256733



### Confidential Report

<b>Client:</b> Schrader Electronics Ltd.	<b>Test of:</b> AG2FW4
11 Technology Park Belfast Road Antrim Northern Ireland BT411QS  Attention: Ms. Zoe Gourley	<b>Tested to:</b> EN 62368-1: 2014 Audio/video information and communication technology equipment - Safety part 1: Safety requirements

---

#### COPIES TO: Files

---

**REPORT REF:** 20S8662-1

**TESTED BY:** N. Duignan

---

**DATE RECEIVED:** 03 March 2020

**REPORT BY:** N. Duignan

---

**ISSUE DATE:** 28 April 2020

**APPROVED SIGNATORY:** J McAuley

---


**JOB TITLE:** Technical Manager



---

**SIGNATURE:**

*John Mc Auley*

---

<b>TEST REPORT</b> <b>IEC 62368-1</b> <b>Audio/video, information and communication technology equipment</b> <b>Part 1: Safety requirements</b>	
Report Number .....	20S8662-1
Date of issue.....	28 April 2020
Total number of pages .....	51
<b>Applicant's name</b> .....	Schrader Electronics Ltd
Address .....	11 Technology Park, Belfast Road, Antrim, Northern Ireland, BT411QS
<b>Test specification:</b>	
Standard .....	IEC 62368-1:2014 (Second Edition)
Test procedure .....	CB Scheme
Non-standard test method.....	N/A
<b>Test Report Form No.</b> .....	IEC62368_1
Test Report Form(s) Originator .....	UL(US)
Master TRF.....	2015-06
<p><b>Copyright © 2015 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.</b></p> <p>This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.</p> <p>If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.</p> <p><b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b></p>	
<b>General disclaimer:</b>	
<p>The test results presented in this report relate only to the object tested.  This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.</p>	
Test Item description .....	Tyre Pressure Monitor and Transmitter
Trade Mark .....	
Manufacturer .....	Schrader Electronics Ltd.
Model/Type reference.....	AG2FW4
Rating .....	3 Vdc

Testing procedure and testing location:		
<input type="checkbox"/>	Testing Laboratory:	Compliance Engineering Ireland
Testing location/ address .....		Clonross, Dunshaughlin, Co Meath, Ireland
Tested by (name, function, signature)...		Nigel Duignan 
Approved by (name, function, signature) :		John McAuley 
<input type="checkbox"/>	Testing procedure: CTF Stage 1	
Testing location/ address.....		
Tested by (name, function, signature)...		
Approved by (name, function, signature) :		
<input type="checkbox"/>	Testing procedure: CTF Stage 2	
Testing location/ address.....		
Tested by (name, function, signature)...		
Witnessed by (name, function, signature) .....		
Approved by (name, function, signature) :		
<input type="checkbox"/>	Testing procedure: CTF Stage 3	
<input type="checkbox"/>	Testing procedure: CTF Stage 4	
Testing location/ address.....		
Tested by (name, function, signature)...		
Approved by (name, function, signature) :		
Supervised by (name, function, signature):		

<b>List of Attachments (including a total number of pages in each attachment):</b>	
<b>Summary of testing:</b> Testing to EN 62368-1: 2014  The AG2FW4 was found to comply with the standard.	
<b>Tests performed (name of test and test clause):</b>  Applicable tests of EN 62368-1:2014	<b>Testing location:</b>  CEI Ltd Clonross Dunshuaghlin Co. Meath
<b>Summary of compliance with National Differences:</b> <b>List of countries addressed</b> <ul style="list-style-type: none"><li>• Europe</li></ul> <input checked="" type="checkbox"/> <b>The product fulfils the requirements of <u>EN 62368-1:2014</u> (insert standard number and edition and delete the text in parenthesis or delete the whole sentence if not applicable)</b>	

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

AG2FW4



<b>TEST ITEM PARTICULARS:</b>	
Classification of use by .....	<input checked="" type="checkbox"/> Ordinary person <input type="checkbox"/> Instructed person <input type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present
Supply Connection.....	<input type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input checked="" type="checkbox"/> External Circuit - not Mains connected - <input checked="" type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance .....	<input type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> +____%/ -____% <input checked="" type="checkbox"/> None
Supply Connection – Type .....	<input type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input checked="" type="checkbox"/> other: <u>Internal Battery</u>
Considered current rating of protective device as part of building or equipment installation .....	_- A; Installation location: <input type="checkbox"/> building; <input checked="" type="checkbox"/> equipment
Equipment mobility.....	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC) .....	<input checked="" type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: _____
Class of equipment .....	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input checked="" type="checkbox"/> Class III
Access location .....	<input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> N/A
Pollution degree (PD) .....	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient.:	120 °C
IP protection class .....	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP____
Power Systems .....	<input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input type="checkbox"/> IT - ____ V <sub>L-L</sub>
Altitude during operation (m) .....	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> ____ m
Altitude of test laboratory (m) .....	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> 63 m
Mass of equipment (kg) .....	<input checked="" type="checkbox"/> 0.2 kg
<b>POSSIBLE TEST CASE VERDICTS:</b>	
- test case does not apply to the test object.....	N/A
- test object does meet the requirement .....	P (Pass)
- test object does not meet the requirement .....	F (Fail)

<b>TESTING:</b>	
Date of receipt of test item..... :	03 March 2020
Date (s) of performance of tests..... :	03 March 2020 – 28 April 2020
<b>GENERAL REMARKS:</b>	
<p>"(See Enclosure #)" refers to additional information appended to the report.  "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> <p>This Test Report covers test results for IEC 62368-1: 2014 (Second Edition).</p> <p>This assessment was made with the data provided outlining that the equipment was previously assessed and met the requirements of EN 60950-1. The details of this assessment are available in report "Test-Report-Safety-1506507278" (CEI report 17S6909-1)</p>	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 02:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
Name and address of factory (ies) .....	
<b>GENERAL PRODUCT INFORMATION:</b>	
<b>Product Description</b> – Tyre Pressure Monitor and Transmitter	
<b>Model Differences</b> – N/A	
<b>Additional application considerations</b> – (Considerations used to test a component or sub-assembly) –	





<b>ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:</b>	
(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.) (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)	
<b>Electrically-caused injury (Clause 5):</b> (Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification) Example: +5 V dc input <span style="float: right;">ES1</span>	
<b>Source of electrical energy</b>	<b>Corresponding classification (ES)</b>
Battery and PCB	ES1
<b>Electrically-caused fire (Clause 6):</b> (Note: List sub-assembly or circuit designation and corresponding energy source classification) Example: Battery pack (maximum 85 watts): <span style="float: right;">PS2</span>	
<b>Source of power or PIS</b>	<b>Corresponding classification (PS)</b>
Battery and PCB	PS1
<b>Injury caused by hazardous substances (Clause 7)</b> (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.) Example: Liquid in filled component <span style="float: right;">Glycol</span>	
<b>Source of hazardous substances</b>	<b>Corresponding chemical</b>
Battery	Lithium
<b>Mechanically-caused injury (Clause 8)</b> (Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.) Example: Wall mount unit <span style="float: right;">MS2</span>	
<b>Source of kinetic/mechanical energy</b>	<b>Corresponding classification (MS)</b>
<b>Thermal burn injury (Clause 9)</b> (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.) Example: Hand-held scanner – thermoplastic enclosure <span style="float: right;">TS1</span>	
<b>Source of thermal energy</b>	<b>Corresponding classification (TS)</b>
Battery and PCB	TS1
<b>Radiation (Clause 10)</b> (Note: List the types of radiation present in the product and the corresponding energy source classification.) Example: DVD – Class 1 Laser Product <span style="float: right;">RS1</span>	
<b>Type of radiation</b>	<b>Corresponding classification (RS)</b>



**ENERGY SOURCE DIAGRAM**

Indicate which energy sources are included in the energy source diagram. Insert diagram below

ES     PS     MS     TS     RS

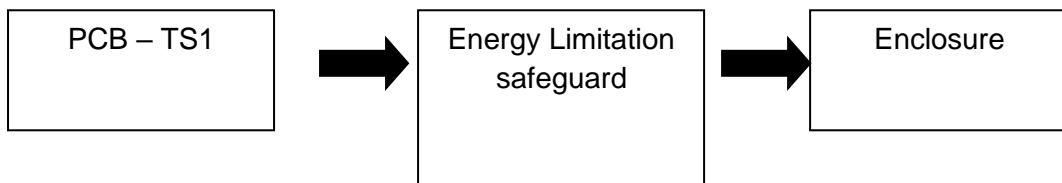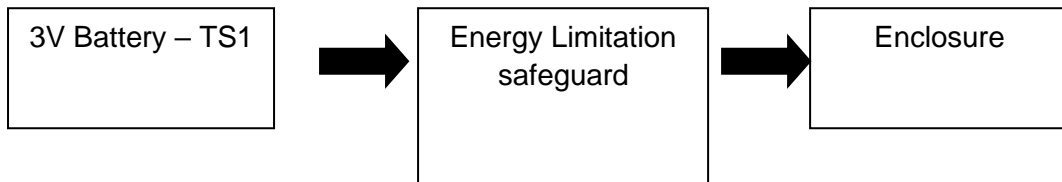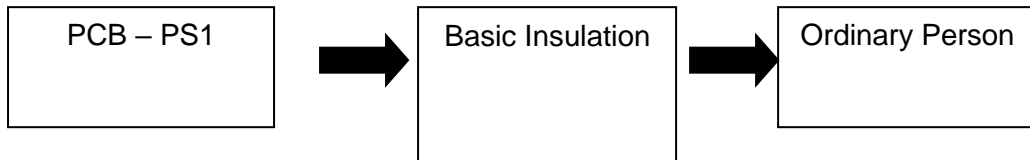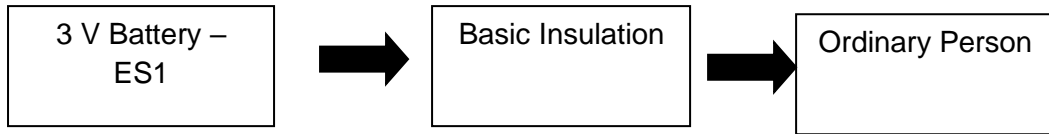

<b>OVERVIEW OF EMPLOYED SAFEGUARDS</b>				
<b>Clause</b>	<b>Possible Hazard</b>			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
Hand/Finger	ES1: Battery	Enclosure		
Hand/Finger	ES1: PCB	Enclosure		
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Enclosure	PS1	Energy limitation		
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosure)
		N/A		
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>GENERAL REQUIREMENTS</b>		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components		P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions..... :	(See Annex F)	—
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests..... :	(See Annex T.4, T.5)	—
4.4.4.3	Drop tests ..... :	(See Annex T.7)	—
4.4.4.4	Impact tests ..... :	(See Annex T.6)	—
4.4.4.5	Internal accessible safeguard enclosure and barrier tests ..... :	(See Annex T.3)	—
4.4.4.6	Glass Impact tests..... :	(See Annex T.9, Annex U)	—
4.4.4.7	Thermoplastic material tests ..... :	(See Annex T.8)	—
4.4.4.8	Air comprising a safeguard..... :	(See Annex T)	—
4.4.4.9	Accessibility and safeguard effectiveness		P
4.5	Explosion		P
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to ..... :	-	—
4.7	Equipment for direct insertion into mains socket – outlets		N/A
4.7.2	Mains plug part complies with the relevant standard..... :	-	—
4.7.3	Torque (Nm) ..... :	-	—
4.8	Products containing coin/button cell batteries		N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction	Battery not accessible via door or removable cover	N/A
	Means to reduce the possibility of children removing the battery..... :		—
4.8.4	Battery Compartment Mechanical Tests ..... :	(See Table 4.8.4) Equipment not likely to be accessible to children after installation	—
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object..... :	(See Annex P)	—

**IEC 62368-1 (ed.2)**

Clause	Requirement + Test	Result - Remark	Verdict
<b>5</b>	<b>ELECTRICALLY-CAUSED INJURY</b>		<b>P</b>
5.2.1	Electrical energy source classifications .....	(See appended table 5.2)	—
5.2.2	ES1, ES2 and ES3 limits	ES1	P
5.2.2.2	Steady-state voltage and current .....	See appended table 5.2)	—
5.2.2.3	Capacitance limits .....	(See appended table 5.2)	—
5.2.2.4	Single pulse limits .....	(See appended table 5.2)	—
5.2.2.5	Limits for repetitive pulses .....	(See appended table 5.2)	—
5.2.2.6	Ringing signals .....	(See Annex H)	—
5.2.2.7	Audio signals .....	(See Clause E.1 )	—
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons	No safeguards required for ES1 but energy source contained within sealed plastic enclosure	P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements	No ES3 voltages	N/A
	a) Test with test probe from Annex V .....		—
	b) Electric strength test potential (V) .....		—
	c) Air gap (mm) .....		—
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Humidity conditioning .....	(See sub-clause 5.4.8)	—
5.4.1.4	Maximum operating temperature for insulating materials .....	(See appended table 5.4.1.4)	—
5.4.1.5	Pollution degree .....	2	—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage		P
5.4.1.9	Insulating surfaces		P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat softening temperature.....	(See appended table 5.4.1.10.2)	—
5.4.1.10.3	Ball pressure .....	(See appended table 5.4.1.10.3)	—
5.4.2	Clearances		P

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.2.2	Determining clearance using peak working voltage	(See appended table 5.4.2.2)	P
5.4.2.3	Determining clearance using required withstand voltage .....	(See appended table 5.4.2.3)	—
	a) a.c. mains transient voltage .....		—
	b) d.c. mains transient voltage .....		—
	c) external circuit transient voltage .....		—
	d) transient voltage determined by measurement ... :		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test	(See appended table 5.4.2.4)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages .....		—
5.4.3	Creepage distances .....	(See appended table 5.4.3)	—
5.4.3.1	General		P
5.4.3.3	Material Group .....		—
5.4.4	Solid insulation		P
5.4.4.2	Minimum distance through insulation .....	(See appended table 5.4.4.2)	P
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material		N/A
	Number of layers (pcs) .....		—
5.4.4.6.3	Non-separable thin sheet material		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material .....	(See appended Table 5.4.9)	—
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz .....	(See appended Table 5.4.4.9)	—
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance (MΩ) .....		—
5.4.6	Insulation of internal wire as part of supplementary safeguard .....	(See appended table 5.4.4.2)	—
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		N/A
	Relative humidity (%) .....		—

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Temperature (°C) .....		—
	Duration (h) .....		—
5.4.9	Electric strength test.....	(See appended table 5.4.9)	—
5.4.9.1	Test procedure for a solid insulation type test		N/A
5.4.9.2	Test procedure for routine tests		N/A
5.4.10	Protection against transient voltages between external circuit		N/A
5.4.10.1	Parts and circuits separated from external circuits	No such parts (See appended table 5.4.9)	N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test .....	(See appended table 5.4.9)	—
5.4.10.2.3	Steady-state test .....	(See appended table 5.4.9)	—
5.4.11	Insulation between external circuits and earthed circuitry .....	(See appended table 5.4.9)	—
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage $U_{op}$ (V) .....		—
	Nominal voltage $U_{peak}$ (V) .....		—
	Max increase due to variation $U_{sp}$ .....		—
	Max increase due to ageing $\Delta U_{sa}$ .....		—
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$ .....		—
5.5	Components as safeguards		N/A
5.5.1	General		N/A
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector .....	(See appended table 5.5.2.2)	—
5.5.3	Transformers	(See Annex G.5.3)	N/A
5.5.4	Optocouplers	(See sub-clause 5.4 or Annex G.12)	N/A
5.5.5	Relays	(See Annex G.2)	N/A
5.5.6	Resistors	(See Annex G.10) Bridging functional insulation only	N/A
5.5.7	SPD's	(See Annex G.8)	N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable..... :	(See Annex G.10.3)	—
5.6	Protective conductor		N/A
5.6.2	Requirement for protective conductors		N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm <sup>2</sup> ) ..... :		—
5.6.4	Requirement for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm <sup>2</sup> ). ..... :		—
	Protective current rating (A) ..... :		—
5.6.4.3	Current limiting and overcurrent protective devices		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm <sup>2</sup> ), nominal thread diameter (mm). ..... :		—
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method Resistance ( $\Omega$ ) ..... :	(See appended table 5.6.6.2)	—
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		P
5.7.2	Measuring devices and networks		P
5.7.2.1	Measurement of touch current ..... :	0 mA (See appended table 5.7.4)	—
5.7.2.2	Measurement of prospective touch voltage		P
5.7.3	Equipment set-up, supply connections and earth connections		P
	System of interconnected equipment (separate connections/single connection) ..... :		—
	Multiple connections to mains (one connection at a time/simultaneous connections) ..... :		—
5.7.4	Earthed conductive accessible parts..... :	(See appended Table 5.7.4)	N/A
5.7.5	Protective conductor current		N/A
	Supply Voltage (V) ..... :		—
	Measured current (mA) ..... :		—
	Instructional Safeguard ..... :	(See F.4 and F.5)	—

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6	Prospective touch voltage and touch current due to external circuits	No external circuits	N/A
5.7.6.1	Touch current from coaxial cables	Not connected to such circuits	N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits		N/A
	a) Equipment with earthed external circuits Measured current (mA) .....		—
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA) .....		—

<b>6</b>	<b>ELECTRICALLY- CAUSED FIRE</b>		<b>P</b>
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		<b>P</b>
6.2.2	Power source circuit classifications		<b>P</b>
6.2.2.1	General		<b>P</b>
6.2.2.2	Power measurement for worst-case load fault ... :	(See appended table 6.2.2)	—
6.2.2.3	Power measurement for worst-case power source fault .....	(See appended table 6.2.2)	—
6.2.2.4	PS1 .....	(See appended table 6.2.2)	—
6.2.2.5	PS2 .....	(See appended table 6.2.2)	—
6.2.2.6	PS3 .....	(See appended table 6.2.2)	—
6.2.3	Classification of potential ignition sources	PS1	<b>P</b>
6.2.3.1	Arcing PIS .....	(See appended table 6.2.3.1)	—
6.2.3.2	Resistive PIS .....	(See appended table 6.2.3.2)	—
6.3	Safeguards against fire under normal operating and abnormal operating conditions		<b>P</b>
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials .....	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	—
6.3.1 (b)	Combustible materials outside fire enclosure		<b>P</b>
6.4	Safeguards against fire under single fault conditions		<b>P</b>
6.4.1	Safeguard Method	Likelihood of ignition reduced	<b>P</b>
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	PS1 not considered to contain enough energy to result in materials reaching ignition temperatures	<b>P</b>
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits	No such circuits	N/A
6.4.3.1	General		N/A
6.4.3.2	Supplementary Safeguards		N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions .....	(See appended table 6.4.3)	—



IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits	No supplementary safeguards required for PS1	P
6.4.5	Control of fire spread in PS2 circuits		N/A
6.4.5.2	Supplementary safeguards .....	(See appended tables 4.1.2 and Annex G)	—
6.4.6	Control of fire spread in PS3 circuit		N/A
6.4.7	Separation of combustible materials from a PIS	No arcing or resistive PIS considered to exist for PS1	N/A
6.4.7.1	General.....	(See tables 6.2.3.1 and 6.2.3.2)	—
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		N/A
6.4.8.1	Fire enclosure and fire barrier material properties		N/A
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		N/A
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		N/A
6.4.8.3.1	Fire enclosure and fire barrier openings		N/A
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm) .....		—
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm) .....		—
	Flammability tests for the bottom of a fire enclosure .....		—
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c) .....		—
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating.....		—
6.5	Internal and external wiring		N/A
6.5.1	Requirements	No PS2 or PS3 circuits	N/A
6.5.2	Cross-sectional area (mm <sup>2</sup> ) .....		—
6.5.3	Requirements for interconnection to building wiring .....	(See Annex Q.)	—
6.6	Safeguards against fire due to connection to additional equipment		N/A
	External port limited to PS2 or complies with Clause Q.1		N/A

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
<b>7</b>	<b>INJURY CAUSED BY HAZARDOUS SUBSTANCES</b>		<b>P</b>
7.2	Reduction of exposure to hazardous substances	No hazardous substances identified	N/A
7.3	Ozone exposure		N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions .....		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010) .....		—
7.6	Batteries .....	(See Annex M)	—

<b>8</b>	<b>MECHANICALLY-CAUSED INJURY</b>		<b>P</b>
8.1	General		N/A
8.2	Mechanical energy source classifications		N/A
8.3	Safeguards against mechanical energy sources		N/A
8.4	Safeguards against parts with sharp edges and corners		N/A
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts	No moving parts	N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
8.5.2	Instructional Safeguard .....		—
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks .....	(See Annex F.4 and Annex K)	—
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard .....		—
8.5.4.2.3	Disconnection from the supply	No directly connected to the supply	N/A
8.5.4.2.4	Probe type and force (N) .....		—
8.5.5	High Pressure Lamps		N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test .....	(See appended table 8.5.5.2)	—
8.6	Stability	Equipment intended to be built in	N/A
8.6.1	Product classification		N/A
	Instructional Safeguard .....		—
8.6.2	Static stability		N/A
8.6.2.2	Static stability test	Equipment intended to be built in	

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
	Applied Force .....		—
8.6.2.3	Downward Force Test	Equipment intended to be built in	N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt.....		—
8.6.4	Glass slide test	Equipment intended for building in	N/A
8.6.5	Horizontal force test (Applied Force).....		—
	Position of feet or movable parts.....		—
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface) .....		—
8.7.2	Direction and applied force.....		—
8.8	Handles strength		N/A
8.8.1	Classification		N/A
8.8.2	Applied Force .....		—
8.9	Wheels or casters attachment requirements		N/A
8.9.1	Classification		N/A
8.9.2	Applied force .....		—
8.10	Carts, stands and similar carriers		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A
	Instructional Safeguard.....		—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force .....		—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N) .....		—
8.10.6	Thermoplastic temperature stability (°C).....		—
8.11	Mounting means for rack mounted equipment		N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable N .....		—
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas .....	(See Annex T)	—
	Button/Ball diameter (mm).....		—

<b>9</b>	<b>THERMAL BURN INJURY</b>		<b>P</b>
9.2	Thermal energy source classifications	TS1	P

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
9.3	Safeguard against thermal energy sources	TS1 limits not exceeded in normal or single fault conditions	P
9.4	Requirements for safeguards		P
9.4.1	Equipment safeguard		N/A
9.4.2	Instructional safeguard .....		—

<b>10</b>	<b>RADIATION</b>		N/A
10.2	Radiation energy source classification		N/A
10.2.1	General classification		N/A
10.3	Protection against laser radiation		N/A
	Laser radiation that exists equipment..... :		—
	Normal, abnormal, single-fault .....	(See attached laser test report)	—
	Instructional safeguard .....		—
	Tool..... :		—
10.4	Protection against visible, infrared, and UV radiation		N/A
10.4.1	General		N/A
10.4.1.a)	RS3 for Ordinary and instructed persons .....		—
10.4.1.b)	RS3 accessible to a skilled person..... :		—
	Personal safeguard (PPE) instructional safeguard .....		—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 :		—
10.4.1.d)	Normal, abnormal, single-fault conditions .....	(See appended table B.3 & B.4)	—
10.4.1.e)	Enclosure material employed as safeguard is opaque..... :		—
10.4.1.f)	UV attenuation..... :		—
10.4.1.g)	Materials resistant to degradation UV .....		—
10.4.1.h)	Enclosure containment of optical radiation .....		—
10.4.1.i)	Exempt Group under normal operating conditions .....		—
10.4.2	Instructional safeguard .....		—
10.5	Protection against x-radiation		N/A
10.5.1	X- radiation energy source that exists equipment :	(See appended table B.3 & B.4)	—
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards .....		—
	Instructional safeguard for skilled person..... :		—
10.5.3	Most unfavourable supply voltage to give maximum radiation .....		—
	(IEC 60950-1, Annex H)		

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
	Abnormal and single-fault condition .....	(See appended table B.3 & B.4)	—
	Maximum radiation (pA/kg) .....		—
10.6	Protection against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A).....		—
	Output voltage, unweighted r.m.s.....		—
10.6.4	Protection of persons		N/A
	Instructional safeguards .....		—
	Equipment safeguard prevent ordinary person to RS2.....		—
	Means to actively inform user of increase sound pressure.....		—
	Equipment safeguard prevent ordinary person to RS2.....		—
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analogue input		N/A
	Input voltage with 94 dB(A) LAeq acoustic pressure output.....		—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A).....		—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A).....		—

<b>B</b>	<b>NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS</b>		P
B.2	Normal Operating Conditions		P
B.2.1	General requirements.....	(See Test Item Particulars and appended test tables)	—
	Audio Amplifiers and equipment with audio amplifiers .....	(See Annex E)	—
B.2.3	Supply voltage and tolerances	Not directly connected to mains	N/A
B.2.5	Input test.....	(See appended table B.2.5)	—
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements.....	(See appended table B.3)	—
B.3.2	Covering of ventilation openings		N/A
B.3.3	D.C. mains polarity test		N/A
B.3.4	Setting of voltage selector .....		—

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
B.3.5	Maximum load at output terminals .....		—
B.3.6	Reverse battery polarity		N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.		N/A
B.3.8	Safeguards functional during and after abnormal operating conditions		N/A
B.4	Simulated single fault conditions		P
B.4.2	Temperature controlling device open or short-circuited .....	(See appended table B.4)	—
B.4.3	Motor tests		N/A
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature .....	(See Clause G.5)	—
B.4.4	Short circuit of functional insulation		N/A
B.4.4.1	Short circuit of clearances for functional insulation		P
B.4.4.2	Short circuit of creepage distances for functional insulation		P
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnect of passive components		P
B.4.7	Continuous operation of components		N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		P
B.4.9	Battery charging under single fault conditions ...	(See Annex M)	—

<b>C</b>	<b>UV RADIATION</b>		N/A
C.1	Protection of materials in equipment from UV radiation		N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A

<b>D</b>	<b>TEST GENERATORS</b>		N/A
D.1	Impulse test generators		N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A

**IEC 62368-1 (ed.2)**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<b>E</b>	<b>TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS</b>		N/A
E.1	Audio amplifier normal operating conditions		N/A
	Audio signal voltage (V) .....		—
	Rated load impedance ( $\Omega$ ) .....		—
E.2	Audio amplifier abnormal operating conditions		N/A

<b>F</b>	<b>EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS</b>		P
F.1	General requirements		P
	Instructions – Language .....		—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations		P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification .....	Shrader Electronics Ltd.	—
F.3.2.2	Model identification .....	AG2FW4	—
F.3.3	Equipment rating markings		N/A
F.3.3.1	Equipment with direct connection to mains		N/A
F.3.3.2	Equipment without direct connection to mains	Not required to be marked	P
F.3.3.3	Nature of supply voltage.....		—
F.3.3.4	Rated voltage .....		—
F.3.3.4	Rated frequency .....		—
F.3.3.6	Rated current or rated power .....		—
F.3.3.7	Equipment with multiple supply connections		N/A
F.3.4	Voltage setting device		N/A
F.3.5	Terminals and operating devices		N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings.....		—
F.3.5.2	Switch position identification marking .....		—
F.3.5.3	Replacement fuse identification and rating markings.....		—
F.3.5.4	Replacement battery identification marking .....		—
F.3.5.5	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		N/A
F.3.6.1	Class I Equipment		N/A

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.6.1.1	Protective earthing conductor terminal		N/A
F.3.6.1.2	Neutral conductor terminal		N/A
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)		N/A
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking .....		—
F.3.8	External power supply output marking		N/A
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings		P
F.4	Instructions		N/A
	a) Equipment for use in locations where children not likely to be present – marking		N/A
	b) Instructions given for installation or initial use		N/A
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		N/A
	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		N/A
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		N/A
	Where “instructional safeguard” is referenced in the test report it specifies the required elements, location of marking and/or instruction		N/A

<b>G</b>	<b>COMPONENTS</b>		P
<b>G.1</b>	<b>Switches</b>		N/A
G.1.1	General requirements		N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
<b>G.2</b>	<b>Relays</b>		N/A
G.2.1	General requirements		N/A



<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay, modified as stated in G.2		N/A
<b>G.3</b>	<b>Protection Devices</b>		N/A
G.3.1	Thermal cut-offs		N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691		N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H) .....		—
	Single Fault Condition .....		—
	Test Voltage (V) and Insulation Resistance ( $\Omega$ ) . :		—
G.3.3	PTC Thermistors		N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions.....	(See appended Table B.4)	—
<b>G.4</b>	<b>Connectors</b>		N/A
G.4.1	Spacings		N/A
G.4.2	Mains connector configuration .....		—
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
<b>G.5</b>	<b>Wound Components</b>		N/A
G.5.1	Wire insulation in wound components.....	(See Annex J)	—
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°		N/A
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s) .....		—
	Temperature (°C) .....		—
G.5.2.3	Wound Components supplied by mains		N/A

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
<b>G.5.3</b>	<b>Transformers</b>		N/A
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1).....:		—
	Position.....:		—
	Method of protection .....		—
G.5.3.2	Insulation		N/A
	Protection from displacement of windings.....:		—
G.5.3.3	Overload test .....	(See appended table B.3)	—
G.5.3.3.1	Test conditions		N/A
G.5.3.3.2	Winding Temperatures testing in the unit		N/A
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
<b>G.5.4</b>	<b>Motors</b>		N/A
G.5.4.1	General requirements	No motors	N/A
	Position .....		—
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days) .....		—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V) .....		—
G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h) .....		—
	Electric strength test (V) .....		—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature .....		—
	Electric strength test (V) .....		—
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h) .....		—
	Electric strength test (V) .....		—
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage .....		—
<b>G.6</b>	<b>Wire Insulation</b>		N/A
G.6.1	General		N/A

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
G.6.2	Solvent-based enamel wiring insulation		N/A
<b>G.7</b>	<b>Mains supply cords</b>		N/A
G.7.1	General requirements		N/A
	Type.....:		—
	Rated current (A).....:		—
	Cross-sectional area (mm <sup>2</sup> ), (AWG).....:		—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N) .....		—
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm).....:		—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry .....	(See appended table 5.4.11.1)	—
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g) .....		—
	Diameter (m) .....		—
	Temperature (°C) .....		—
G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
<b>G.8</b>	<b>Varistors</b>		N/A
G.8.1	General requirements		N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test .....	(See appended table B.3)	—
G.8.3.3	Temporary overvoltage .....	(See appended table B.3)	—
<b>G.9</b>	<b>Integrated Circuit (IC) Current Limiters</b>		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.		N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA .....		—
G.9.1 d)	IC limiter output current (max. 5A) .....		—
G.9.1 e)	Manufacturers' defined drift .....		—
G.9.2	Test Program 1		N/A

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
<b>G.10</b>	<b>Resistors</b>		N/A
G.10.1	General requirements	No resistors used as a safeguard	N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
<b>G.11</b>	<b>Capacitor and RC units</b>		N/A
G.11.1	General requirements		N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
<b>G.12</b>	<b>Optocouplers</b>		N/A
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results) .....		N/A
	Type test voltage $V_{ini}$ .....		—
	Routine test voltage, $V_{ini,b}$ .....		—
<b>G.13</b>	<b>Printed boards</b>		P
G.13.1	General requirements		P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		P
	Compliance with cemented joint requirements (Specify construction) .....		—
G.13.5	Insulation between conductors on different surfaces		P
	Distance through insulation .....	(See appended table 5.4.4.5)	—
	Number of insulation layers (pcs) .....		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
<b>G.14</b>	<b>Coating on components terminals</b>		N/A
G.14.1	Requirements .....	(See G.13)	—

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
<b>G.15</b>	<b>Liquid filled components</b>		N/A
G.15.1	General requirements		N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
<b>G.16</b>	<b>IC including capacitor discharge function (ICX)</b>		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours		N/A
b)	Impulse test using circuit 2 with $U_c =$ to transient voltage .....		—
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage .....		—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A
D2)	Capacitance .....		—
D3)	Resistance .....		—

<b>H</b>	<b>CRITERIA FOR TELEPHONE RINGING SIGNALS</b>		N/A
H.1	General		N/A
H.2	Method A)		N/A
H.3	Method B		N/A
H.3.1	Ringling signal		N/A
H.3.1.1	Frequency (Hz) .....		—
H.3.1.2	Voltage (V) .....		—
H.3.1.3	Cadence; time (s) and voltage (V) .....		—
H.3.1.4	Single fault current (mA):.....		—
H.3.2	Tripping device and monitoring voltage .....		—
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V) .....		—

**IEC 62368-1 (ed.2)**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<b>J</b>	<b>INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION</b>		N/A
	General requirements	(See separate test report)	N/A

<b>K</b>	<b>SAFETY INTERLOCKS</b>		N/A
K.1	General requirements		N/A
K.2	Components of safety interlock safeguard mechanism .....	(See Annex G)	—
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance .....	(See appended table B.4)	—
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method .....		—
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location) .....		—
K.7.2	Overload test, Current (A) .....		—
K.7.3	Endurance test		N/A
K.7.4	Electric strength test .....	(See appended table 5.4.11)	—

<b>L</b>	<b>DISCONNECT DEVICES</b>		N/A
L.1	General requirements	Not directly connected to mains	N/A
L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single phase equipment		N/A
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		N/A
L.8	Multiple power sources		N/A

<b>M</b>	<b>EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS</b>		P
M.1	General requirements		P
M.2	Safety of batteries and their cells	Battery approved to UL MH12568	P
M.2.1	Requirements		N/A
M.2.2	Compliance and test method (identify method) .. :		—
M.3	Protection circuits		N/A

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
M.3.1	Requirements		N/A
M.3.2	Tests		N/A
	- Overcharging of a rechargeable battery		N/A
	- Unintentional charging of a non-rechargeable battery		N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery		N/A
M.3.3	Compliance .....	(See appended Tables and Annex M and M.4)	—
M.4	Additional safeguards for equipment containing secondary lithium battery	No secondary cells	N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A
M.4.2.2a)	Charging voltage, current and temperature .....	(See Table M.4)	—
M.4.2.2 b)	Single faults in charging circuitry .....	(See Annex B.4)	—
M.4.3	Fire Enclosure		N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A
	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits		N/A
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method) .....		—
M.6.2	Leakage current (mA) .....		—
M.7	Risk of explosion from lead acid and NiCd batteries		N/A

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries		N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume $V_z$ (m <sup>3</sup> /s)..... :		—
M.8.2.3	Correction factors..... :		—
M.8.2.4	Calculation of distance $d$ (mm) ..... :		—
M.9	Preventing electrolyte spillage		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) ..... : (IEC 60065, 5.5.1)		—

<b>N</b>	<b>ELECTROCHEMICAL POTENTIALS</b>		<b>P</b>
	Metal(s) used ..... :	Pollution degree considered	—

<b>O</b>	<b>MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES</b>		<b>P</b>
	Figures O.1 to O.20 of this Annex applied..... :		—

<b>P</b>	<b>SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS</b>		<b>P</b>
P.1	General requirements	Equipment for building in	N/A
P.2.2	Safeguards against entry of foreign object		N/A
	Location and Dimensions (mm) ..... :		—
P.2.3	Safeguard against the consequences of entry of foreign object		N/A
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A
	Transportable equipment with metalized plastic parts ..... :		—
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) ..... :		—
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General requirements		N/A



IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts		N/A
P.4.2 a)	Conditioning testing		N/A
	Tc (°C).....: :		—
	Tr (°C) .....: :		—
	Ta (°C).....: :		—
P.4.2 b)	Abrasion testing .....: :	(See G.13.6.2)	—
P.4.2 c)	Mechanical strength testing .....: :	(See Annex T)	—

Q	CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING		N/A
Q.1	Limited power sources		N/A
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		N/A
	- Regulating network limited output under normal operating and simulated single fault condition		N/A
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A) .....: :		—
	Current limiting method .....: :		—

R	LIMITED SHORT CIRCUIT TEST		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A
R.3	Test method Supply voltage (V) and short-circuit current (A). .....: :		—

S	TESTS FOR RESISTANCE TO HEAT AND FIRE		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material .....: :		—
	Wall thickness (mm) .....: :		—
	Conditioning (°C).....: :		—

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material .....		—
	Wall thickness (mm) .....		—
	Conditioning (°C) .....		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material .....		—
	Wall thickness (mm) .....		—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material .....		—
	Wall thickness (mm) .....		—
	Conditioning (test condition), (°C) .....		—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A

T	MECHANICAL STRENGTH TESTS		P
T.1	General requirements		P
T.2	Steady force test, 10 N .....	(See appended table T.2)	—
T.3	Steady force test, 30 N .....	(See appended table T3)	—
T.4	Steady force test, 100 N .....	(See appended table T4)	—
T.5	Steady force test, 250 N .....	(See appended table T5)	—
T.6	Enclosure impact test	(See appended table T6) Equipment for building in	N/A

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Fall test		N/A
	Swing test		N/A
T.7	Drop test .....	(See appended table T7)	—
T.8	Stress relief test .....	(See appended table T8)	—
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J).....		—
	Height (m) .....		—
T.10	Glass fragmentation test .....	(See sub-clause 4.4.4.9)	—
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm) .....		—

<b>U</b>	<b>MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION</b>		N/A
U.1	General requirements		N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen.....	(See Annex T)	—

<b>V</b>	<b>DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)</b>		P
V.1	Accessible parts of equipment		P
V.2	Accessible part criterion		P

**IEC 62368-1 (ed.2)**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

<b>4.1.2 TABLE: List of critical components</b>					
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1</sup>
- Description <sup>2)</sup> :					
Enclosure	Royal DSM	Akulon K224-G7 PA66-GF-35	220 °C melting temp, HB	IEC 60695-11-10	Tested in application
PCB	Thai Laminate Manufacturer Co. Ltd.	FR4-TKM140	V-0	UL94	UL, E174552
Battery	Maxell	CR2050	3 V, 220 mAh	MH12568	UL
- Description <sup>2)</sup> :					
- Description <sup>2)</sup> :					
- Description <sup>2)</sup> :					

Supplementary information:

<sup>1)</sup> Provided evidence ensures the agreed level of compliance.

<sup>2)</sup> Description line content is optional. Main line description needs to clearly detail the component used for testing

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.4, 4.8.5	<b>TABLE: Lithium coin/button cell batteries mechanical tests</b>			N/A
<b>(The following mechanical tests are conducted in the sequence noted.)</b>				
4.8.4.2	<b>TABLE: Stress relief test</b>			—
	Part	Material	Oven Temperature (°C)	Comments
4.8.4.3	<b>TABLE: Battery replacement test</b>			—
	Battery part no. .... :	1		—
	Battery Installation/withdrawal	Battery Installation/Removal Cycle		Comments
		1		
		2		
		3		
		4		
		5		
		6		
		8		
		9		
		10		
4.8.4.4	<b>TABLE: Drop test</b>			—
	Impact Area	Drop Distance	Drop No.	Observations
			1	
			2	
			3	
4.8.4.5	<b>TABLE: Impact</b>			—
	Impacts per surface	Surface tested	Impact energy (Nm)	Comments
4.8.4.6	<b>TABLE: Crush test</b>			—
	Test position	Surface tested	Crushing Force (N)	Duration force applied (s)
Supplementary information:				

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result			N/A
Test position	Surface tested	Force (N)	Duration force applied (s)	

Supplementary information:

5.2	TABLE: Classification of electrical energy sources						P
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (Apk or Arms)	Hz	
1	3 Vdc	Battery	Normal	3	-	0	ES1
			Abnormal	3	-	0	
			Single fault – SC/OC	0	-	0	
			Normal				
			Abnormal				
			Single fault – SC/OC				
5.2.2.3 - Capacitance Limits							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class	
				Capacitance, nF	Upk (V)		
			Normal				
			Abnormal				
			Single fault – SC/OC				
5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	Ipk (mA)	
			Normal				
			Abnormal				
			Single fault – SC/OC				

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

5.2.2.5 - Repetitive Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	Ipk (mA)	
			Normal				
			Abnormal				
			Single fault – SC/OC				

Test Conditions:  
Normal –  
Abnormal -  
Supplementary information: SC=Short Circuit, OC=Short Circuit

5.4.1.4, 6.3.2, 9.0, B.2.6	TABLE: Temperature measurements						P
	Supply voltage (V) .....	3 Vdc					—
	Ambient T <sub>min</sub> (°C) .....	25 °C					—
	Ambient T <sub>max</sub> (°C) .....	25 °C					—
	T <sub>ma</sub> (°C) .....	40 °C					—
Maximum measured temperature T of part/at:			T (°C)				Allowed T <sub>max</sub> (°C)
**							
Supplementary information:							
Temperature T of winding:	t <sub>1</sub> (°C)	R <sub>1</sub> (Ω)	t <sub>2</sub> (°C)	R <sub>2</sub> (Ω)	T (°C)	Allowed T <sub>max</sub> (°C)	Insulation class
Supplementary information: Note 1: T <sub>ma</sub> should be considered as directed by applicable requirement Note 2: T <sub>ma</sub> is not included in assessment of Touch Temperatures (Clause 9)  ** Equipment previously approved to EN 60950-1							

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
<b>5.4.1.10.2</b>	<b>TABLE: Vicat softening temperature of thermoplastics</b>		N/A
Penetration (mm)..... :			—
Object/ Part No./Material	Manufacturer/t rademark	T softening (°C)	
Supplementary information:			

<b>5.4.1.10.3</b>	<b>TABLE: Ball pressure test of thermoplastics</b>			N/A
Allowed impression diameter (mm) .....		≤ 2 mm		—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)	
Supplementary information:				

<b>5.4.2.2, 5.4.2.4 and 5.4.3</b>	<b>TABLE: Minimum Clearances/Creepage distance</b>						P
Clearance (cl) and creepage distance (cr) at/of/between:	Up (V)	U r.m.s. (V)	Frequenc y (kHz) <sup>1</sup>	Required cl (mm)	cl (mm) <sup>2</sup>	Required <sup>3</sup> cr (mm)	cr (mm)
Supplementary information:							
Functional insulation only considered the shorting of which at any location was not considered to pose a risk above ES1 or PS1.							
Note 1: Only for frequency above 30 kHz							
Note 2: See table 5.4.2.4 if this is based on electric strength test							
Note 3: Provide Material Group							



IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.2.3	TABLE: Minimum Clearances distances using required withstand voltage			N/A
	Overvoltage Category (OV) .....			
	Pollution Degree.....			
Clearance distanced between:	Required withstand voltage	Required cl (mm)	Measured cl (mm)	
Supplementary information:				

5.4.2.4	TABLE: Clearances based on electric strength test			N/A
Test voltage applied between:	Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No	
Supplementary information:				

5.4.4.2, 5.4.4.5 c) 5.4.4.9	TABLE: Distance through insulation measurements					N/A
Distance through insulation di at/of:	Peak voltage (V)	Frequency (kHz)	Material	Required DTI (mm)	DTI (mm)	
Supplementary information:						

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

5.4.9	TABLE: Electric strength tests			N/A
Test voltage applied between:	Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No	
Functional:				
Basic/supplementary:				
Reinforced:				
Routine Tests:				
Supplementary information:				

5.5.2.2	TABLE: Stored discharge on capacitors					N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification	
Supplementary information:						
X-capacitors installed for testing are:						
<input type="checkbox"/> bleeding resistor rating:						
<input type="checkbox"/> ICX:						
Notes:						
A. Test Location:						
Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth						
B. Operating condition abbreviations:						
N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition						

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

5.6.6.2	TABLE: Resistance of protective conductors and terminations				N/A
Accessible part	Test current (A)	Duration (min)	Voltage drop (V)	Resistance ( $\Omega$ )	
Supplementary information:					

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part		N/A
Supply voltage .....	12 Vdc		—
Location	Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7		Touch current (mA)
	1		0
	2*		-
	3		0
	4		0
	5		0
	6		0
	8		0
Supplementary Information:			
Notes:			
[1] Supply voltage is the anticipated maximum Touch Voltage			
[2] Earthed neutral conductor [Voltage differences less than 1% or more]			
[3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3			
[4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.			
[5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.			

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

6.2.2	TABLE: Electrical power sources (PS) measurements for classification				
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s <sup>*)</sup>	PS Classification
A	3 V Battery	Power (W) .....			PS1
		VA (V) .....	-	-	
		IA (A) .....			
B		Power (W) .....			
		VA (V) .....			
		IA (A) .....			
C		Power (W) .....			
		VA (V) .....			
		IA (A) .....			
D		Power (W) .....			
		VA (V) .....			
		IA (A) .....			

Supplementary Information:  
 (\* ) Measurement taken only when limits at 3 seconds exceed PS1 limits

6.2.3.1	TABLE: Determination of Potential Ignition Sources (Arcing PIS)				N/A
Location	Open circuit voltage After 3 s (V <sub>p</sub> )	Measured r.m.s current (I <sub>rms</sub> )	Calculated value (V <sub>p</sub> x I <sub>rms</sub> )	Arcing PIS? Yes / No	

Supplementary information:  
 An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V<sub>p</sub>) and normal operating condition rms current (I<sub>rms</sub>) is greater than 15.

6.2.3.2	TABLE: Determination of Potential Ignition Sources (Resistive PIS)				N/A
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary Information:			
<p>A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.</p> <p>If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.</p> <p>A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.</p>			

8.5.5	TABLE: High Pressure Lamp	N/A
Description	Values	Energy Source Classification
Lamp type .....		—
Manufacturer .....		—
Cat no. ....		—
Pressure (cold) (MPa).....		MS_
Pressure (operating) (MPa).....		MS_
Operating time (minutes) .....		—
Explosion method .....		—
Max particle length escaping enclosure (mm) .:		MS_
Max particle length beyond 1 m (mm).....		MS_
Overall result .....		
Supplementary information:		

B.2.5	TABLE: Input test						
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
Supplementary information:							
Equipment may be have rated current or rated power or both. Both should be measured							

<b>IEC 62368-1 (ed.2)</b>			
Clause	Requirement + Test	Result - Remark	Verdict

<b>B.3</b>	<b>TABLE: Abnormal operating condition tests</b>							N/A
Ambient temperature (°C) .....							—	
Power source for EUT: Manufacturer, model/type, output rating .:							—	
Component No.	Abnormal Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
Supplementary information: Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column "Abnormal/Fault." Specify if test condition by indicating "Abnormal" then the condition for a Clause B.3 test or "Single Fault" then the condition for Clause B.4.								

<b>B.4</b>	<b>TABLE: Fault condition tests</b>							P
Ambient temperature (°C) .....		25					—	
Power source for EUT: Manufacturer, model/type, output rating .:		N/A					—	
Component No.	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
**								
Supplementary information: ** Equipment previously approved to EN 60950-1								

IEC 62368-1 (ed.2)										
Clause	Requirement + Test			Result - Remark				Verdict		
<b>Annex M</b>	<b>TABLE: Batteries</b>								P	
The tests of Annex M are applicable only when appropriate battery data is not available								N/A*		
Is it possible to install the battery in a reverse polarity position? .....								N/A		
	Non-rechargeable batteries			Rechargeable batteries						
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging		
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	
Max. current during normal condition										
Max. current during fault condition										
Test results:										
- Chemical leaks										
- Explosion of the battery										
- Emission of flame or expulsion of molten metal										
- Electric strength tests of equipment after completion of tests										
Supplementary information:										
* Approved battery used										

<b>Annex M.4</b>	<b>TABLE: Additional safeguards for equipment containing secondary lithium batteries</b>					N/A	
Battery/Cell No.	Test conditions	Measurements			Observation		
		U	I (A)	Temp (C)			
	Normal						
	Abnormal						
	Single fault –SC/OC						
	Normal						
	Abnormal						
	Single fault – SC/OC						
Supplementary Information:							
Battery identification	Charging at $T_{lowest}$ (°C)	Observation	Charging at $T_{highest}$ (°C)	Observation			

IEC 62368-1 (ed.2)				
Clause	Requirement + Test		Result - Remark	Verdict
Battery identification	Charging at $T_{\text{lowest}}$ (°C)	Observation	Charging at $T_{\text{highest}}$ (°C)	Observation
Supplementary Information:				

Annex Q.1	TABLE: Circuits intended for interconnection with building wiring (LPS)					N/A
Note: Measured UOC (V) with all load circuits disconnected:						
Output Circuit	Components	U <sub>oc</sub> (V)	I <sub>sc</sub> (A)		S (VA)	
			Meas.	Limit	Meas.	Limit
Supplementary Information: SC=Short circuit, OC=Open circuit						

T.2, T.3, T.4, T.5	TABLE: Steady force test					N/A
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation	
Supplementary information:						

T.6, T.9	TABLE: Impact tests				N/A
Part/Location	Material	Thickness (mm)	Vertical distance (mm)	Observation	
Supplementary information:					



IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict

T.7	TABLE: Drop tests				N/A
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation	
Supplementary information:					

T.8	TABLE: Stress relief test					N/A
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Supplementary information:						

## Appendix 1: Photography



Front of EUT



Back of Unit

IEC 62368-1 (ed.2)			
Clause	Requirement + Test	Result - Remark	Verdict



Sensor mounted on PCB



Back of PCB